



Excelis HD LITE

HIGH DEFINITION MICROSCOPY CAMERA

High-fidelity color microscopy camera delivers true, real-time 1080P HD images for a wide variety of scientific, education and industrial applications. On-board software allows operation without a PC or use with **CaptaVision+** advanced imaging software. Optional attachable HD monitor.



Key Features













COLOR

</>





PC ONLY

12 **BIT**







Recommended Applications


BRIGHTFIELD

- Pathology
- Cell biology
- Live cell imaging
- Microbiology

EDUCATION & TRAINING

INDUSTRIAL

- Inspection
- Measurement & Analysis
- Documentation

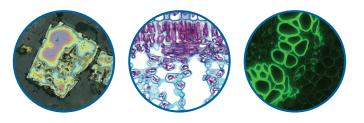

Empowering Discovery. Advancing Results.

Excelis HD Lite Series

HIGH DEFINITION MICROSCOPY CAMERA

Key CaptaVision+ Software Features

- Intuitive & customizable user interface
- Simple calibration and measurements
- Advanced control of exposure, gain, color balance, etc.
- Powerful image processing tools
- Intelligent flat field correction
- Real-time fluorescence image synthesis
- Real-time stitching and depth-of-field fusion
- Flexible report generation and data export



WHAT'S IN THE BOX

Excelis HD Camera, HDMI Cable, USB 2.0 Cable, 12V Power Adapter, 8GB SD Card, USB Mouse, CaptaVision PC Imaging Software

ON-BOARD SOFTWARE FEATURES

No PC required to start imaging!

Camera control including:

- Auto and manual exposure
- White balance (lock or auto)
- Color temperature
- Crossline Display
 - Image browser

Zoom in/out

Image comparison

Image viewing tools:

Horizontal/vertical flip

Capture images and videos to SD card (included)

CAMERA & PC SOFTWARE SPECIFICATIONS

Model	AU-300-HD (no monitor) • AU-300-HDS (w/ 11.6" monitor)
Sensor	Aptina MT9P031
Sensor Size	1/2.5", 0.5x C-mount recommended
Live Resolution	1920x1080
Frame Rate	30fps (HDMI); 15fps (USB 2.0)
Image Capture	High Speed SD Card (8GB)
Video Capture	HDMI: 1080p, 15fps to SD Card USB 2.0: 1080p, 15fps to PC or Mac
Exposure Time	Auto; 0.001 sec - 10.0 sec
White Balance	Auto
Settings	Gain, Gamma, Saturation, Brightness, Sharpness
Built-in Software	Cloud 1.0
	<i>CaptaVision</i> Imaging Software (for PC only; Mac OS not supported)
PC Imaging Software	Advanced Camera Controls: still image measuremen and annotation; flat field correction; extended depth of focus (focus stacking); image stitching; HDR (High Dynamic Range) function
	Image Types: JPEG, PNG, TIFF and DICOM
System Software Compatibility	Windows 7, 8, 10 & 11 (64-bit recommended); Mac OSX (for image transfer to Mac OSX only) <i>System Requirements:</i> Intel processor (Core i5 or higher); 64GB RAM or more; USB 2.0 HighSpeed port
Output Modes	Mode 1: USB 2.0 / Mode 2: HDMI
Power Supply	DC12V/1A
MONITOR SPECIFICATIONS	
Monitor (optional)	Mountable 11.6" HD Display Contrast: 1000:1, Dot Pitch: 0.1338mm
Input Modes	AC power, HDMI

ISO

9001:2015

ISO

14001:2015



Copyright \circledcirc 2022 ACCU-SCOPE Inc. All rights reserved. Printed in the U.S.A. ACCU-SCOPE Inc. reserves the right to change and improve specifications without notice due to technological or manufacturing advances.



100 Lauman Lane, Suite A, Hicksville, NY 11801 Tel: (877) 877-7274 | Fax: (516) 801-2046 Email: Info@nyscopes.com www.microscopeinternational.com

NDAA

